

The width (W) refers to the dimension from the centre line of the tap body to the centre of the spout.

### **Standard Filter Faucets**

Included with your purchase of an Undersink Filter System. All our Standard Filter Faucets feature a chrome finish and

include a base plate and connection fittings.



**Spring Loaded** 



IT001162 Mode



IT003638

Retro



Euro



IT001692 Metro



IT001177

**Petite** 









## **Drinking Water Faucets**

## **Matte Black Filter Faucets**



**Tall** IT003622

**Petite** 



IT003624

Mode



### **Water Rating Label**

The water rating label is displayed against products regulated under the Water Efficiency Labelling and Standards (WELS) scheme.

Our 3 Way Standard, Nova, Side Lever, Stainless Steel Premier and Stainless Steel High Loop Mixers have been registered according to the requirements of the WELS standard (AS/NZS 6400:2016 water efficient products). For more information please visit: www.watershop.com.au/mixers.

# Mixers - Hot, Cold & Filtered Water Faucet

Our chrome finished mixers include a fitted base plate.



IT001165

Standard 3 Way



IT003896

# Nova



IT004221

## Veggie Spray



Long Reach IT001169



High Loop IT003855

**Side Lever** 



IT004128

**Spring Hose** 

## **Drinking Water Faucets**

### Stainless Steel Filter Faucets

Our Stainless Steel Filtered Water Faucets and Mixers feature a brushed chrome finish.



High Loop IT002350

Classic



IT003381

**Spring Loaded** 



IT003397

Wheel

# Stainless Steel Mixers - Hot, Cold & Filtered Water Faucets



Standard Matte Black IT004096



Standard IT002170



**Tall** IT001678

#### **Premier**



**Petite** IT002819



**High Loop Matte Black** IT004052

3 Way



High Loop IT001166

#### PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE ATTEMPTING INSTALLATION


The pure water faucet may be installed on any flat surface over 50mm (2") in diameter. Remember to check the underside of the benchtop location for interference.


**IMPORTANT:** The following instructions are general in nature and may vary from tap to tap. These instructions are **not** for stone or granite benchtops.


#### **Step by Step Instructions**

- Select a location for your new faucet: your faucet may be installed on any flat surface over 50mm (2") in diameter. It is recommended to make a small indent using a centre punch to mark the desired drilling location.
- 2. Drill a hole for the faucet First drill a 3mm pilot hole.


  Then drill a 12mm final hole.
- 3. Assemble the faucet fittings according to your chosen faucet refer to Diagram 1 or 2. Tighten firmly, ensuring that the faucet is correctly aligned in the desired direction over the sink basin.
- 4. Install female Quick Fit Connector to the end of the faucet and connect tube (refer to Diagram 3).



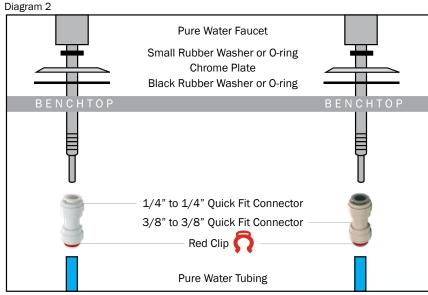




1. To make the connection, push the tube firmly into the collet.



Make sure the tube is pushed as far as it can go and secure with a John Guest red clip.



3. To remove the tube - First remove the red clip. Use two fingers to push onto the collet and at the same time pull out the tube.



North Shore Showroom 425 Miller Street. Cammeray NSW 2062 Inner West Showroom 350 Parramatta Road, Stanmore NSW 2048